BRICKMAN 300 HEAVY DUTY


This version of BRICKMAN 300 with extended cylinder is designed for effective compaction of large amounts of tough material like aluminum material, PET and other plastic containers. The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, BRICKMAN 300 can be placed indoors close to the source of waste.



170кс/н

AUTOMATIC

CAPACITY



ORWAK BENEFITS





MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO_2 emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY BRICKMAN?

- Convenient fully automated compaction solution
- Impressive volume reduction of up to 20:1
- Placement opportunities indoors



BRICKMAN 300 HEAVY DUTY

Turns large volume of material into compact briquettes for recycling

CONVENIENT AND EFFICIENT

BRICKMAN offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding.

Furthermore, optional photocells can automize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

GREAT LOGISTICS

Thanks to BRICKMAN's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.



BRICKMAN 300 HEAVY DUTY IS OPTIMIZED FOR:

ALUMINUM CAPACITY

Aluminum cansAluminum chipsUp to 160 kg/hUp to 300 kg/h

PAPER CAPACITY

shredded paper Up to 300 kg/h

PLASTIC CAPACITY

PET bottles Up to 170 kg/h

■ Plastic containers

DESIGNED FOR VARIOUS TOUGH MATERIAL

Thanks to the following features, this sturdy version of BRICKMAN 300 is especially designed for compaction of shredded paper, aluminum material, empty PET bottles and other plastic containers:

- Extension on the press cylinder
- Automatic greasing of the press plate
- Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop


OPTIONAL ACCESSORIES

BRICKMAN can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

DIMENSIONS & SPECIFICATIONS

DIMENS	DIMENSIONS (mm)																
A	В	С	D	E	F	G	н	ı	J	K	L	М	N	o	P	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600



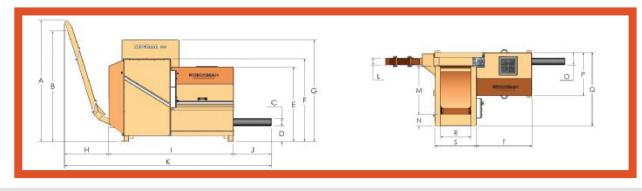

TECHNICAL SPECIFICATIONS PRESS **PROTECTION** MACHINE PRESSURE HOPPER **BRIQUETTE SIZE** DENSITY* **NOISE LEVEL OPERATING POWER** WEIGHT CLASS 400 V, 3-phase, 50 Hz** 25 ton $0.75 \, \text{m}^3$ 80x80x100-300 mm Un to 600 kg/m³ IP 55 1600 ka Up to 500 kg/cm 68 dh (A) Fuse: 25 A (slow) 250 kN

We reserve the right to make changes to specifications without prior notice. * Density varies with type of material. ** Other voltages are available

ORWAK AB

Svetsaregatan 4 S-576 33 Sävsjö SWEDEN Tel: +46-(0)382-15700 info@orwak.com



Engine: 7.5 kW, Voltage 24 V