BRICKMAN 300 ALUMINUM & SHREDDED PAPER


This version of BRICKMAN 300 with extended cylinder is designed for effective compaction of aluminum material such as cans & chips, shredded paper and paper offcuts in graphic industry. The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, BRICKMAN 300 can be placed indoors close to the source of waste.



300кс/н

AUTOMATIC SOLUTION

CAPACITY ALUMINUM CHIPS & SHREDDED

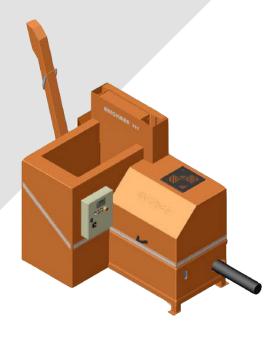

ORWAK BENEFITS





MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO_2 emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY BRICKMAN?

- Convenient fully automated compaction solution
- Impressive volume reduction of up to 20:1
- Placement opportunities indoors



BRICKMAN

300 ALU & SHREDDED PAPER

Turns large volume of material into compact briquettes for recycling

CONVENIENT AND EFFICIENT

BRICKMAN offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding.

Furthermore, optional photocells can automize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

DESIGNED FOR ALU AND SHREDDED PAPER

Thanks to the following features, this sturdy version of BRICKMAN 300 is especially designed for compaction of aluminum cans, shredded paper and paper offcuts:

- Extension on the press cylinder
- Automatic greasing of the press plate





BRICKMAN 300 ALU & SHREDDED PAPER IS OPTIMIZED FOR:

ALUMINUM CAPACITY

Aluminum cansAluminum chipsUp to 160 kg/hUp to 300 kg/h

PAPER CAPACITY

■ shredded paper Up to 300 kg/h

GREAT LOGISTICS

Thanks to BRICKMAN's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.


OPTIONAL ACCESSORIES

BRICKMAN can be ordered with a number of accessories; different chute options, start systems, sound absorbation plates as well as heating and cooling devices.

DIMENSIONS & SPECIFICATIONS

DIMENS	DIMENSIONS (mm)																
A	В	С	D	E	F	G	н	ı	J	К	L	М	N	o	Р	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600



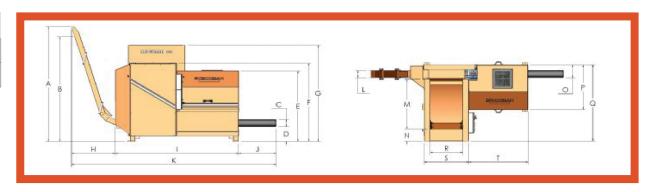

TECHNICAL SPECIFICATIONS PRESS **PROTECTION** MACHINE PRESSURE HOPPER **BRIQUETTE SIZE** DENSITY* **NOISE LEVEL OPERATING POWER** WEIGHT CLASS 400 V, 3-phase, 50 Hz** 25 ton Up to 1200 kg/m³ $0.75 \, \text{m}^3$ 80x80x100-300 mm IP 55 1600 ka Up to 500 kg/cm 68 db(A) Fuse: 25 A (slow) 250 kN Engine: 7.5 kW, Voltage 24 V

We reserve the right to make changes to specifications without prior notice. * Density varies with type of material. ** Other voltages are available

ORWAK AB

Svetsaregatan 4 S-576 33 Sävsjö SWEDEN Tel: +46-(0)382-15700 info@orwak.com

