

ORWAK APARTMENT COMPACTOR

Efficient, hygienic and convenient solution to the challenge to take care of all the bagged waste in residential buildings with classic wall chutes. The compactor has the capacity to serve up to 180 residential units. It starts automatically when the bags drop down from the chute and provides significant volume reduction. The compacted waste is fed into plastic bags.



**HYGIENIC
COMPACTION**



ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our compactor rapidly minimize the space the waste takes up, keeping floor space free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY CHOOSING THE ORWAK APARTMENT COMPACTOR?

- Saves valuable floor space in your storage area
- Keeps the maintenance area neat and tidy
- Hygienic waste management solution for household waste in apartment buildings
- The volume reduction means less waste to collect and cuts the waste reduction costs

ORWAK
PART OF SULO GROUP

APARTMENT COMPACTOR

Saves floor space, cut waste costs and keeps the storage area clean

CAPACITY TO SERVE UP TO 180 RESIDENTIAL UNITS

Orwak's apartment compactor provides premium compaction in big buildings. It is just the right size to fit in your storage/maintenance area and yet large enough to keep up with your compacting needs for a building of up to 180 residential units or less! Make a difference in your building's recycling and waste compaction needs.

AUTO START

The bags conveniently drop down from the chute directly into the hopper of the compactor and thanks to a photocell the machine automatically starts compacting the waste.



Compacted waste in bags ready for collection.

THE APARTMENT COMPACTOR IS OPTIMIZED FOR:

SEMI-DRY WASTE

- General waste

Best suited for dry or semi-dry waste destined for landfill or incineration

CLASSIC "SAUSAGE COMPACTION"



Simply slip a long plastic bag over the nozzle of the compactor and the highly compacted bagged waste will be pushed into the bag. A chain attached to the machine will tighten the bag. The operator then manually cuts and ties the bags.

FEATURES IN DETAIL

- Replaceable wear plates and positive guides
- Motor overload protection and fused circuitry
- Over pressure protection
- Access door safety interlock switch
- "No-bag" cut off switch
- Manual chute cut-off gate
- Electric eye control with time delay
- Off-on key switch
- Operation mode lights
- Positive limit switching

DIMENSIONS

HEIGHT	LENGTH	WIDTH
68"	80"	29 1/2"

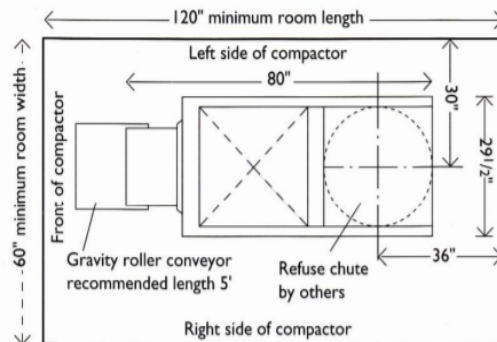

TECHNICAL SPECIFICATIONS

CHAMBER OPENING	PRESS FORCE	CYCLE TIME	OPERATING CAPACITY	OPERATING DENSITY	OUTPUT WEIGHT	MACHINE WEIGHT	OPERATING POWER
21"x24"	30,865 lbs	21 secs	16 cubic yards/h	450-750 lbs/cubic yard	up to 130 lbs	1325 lbs	110 V, 60 Hz

We reserve the right to make changes to specifications without prior notice. Bag weights are dependent upon material type.

ORWAK NORTH AMERICA, INC.

9200 Globe Center Drive, Suite 130
Morrisville
NC 27560, USA
Phone: +1-800-747-0449
Email: info@orwakbalers.com

ORWAKBALERS.COM

