BRICKMAN 300 STAINLESS STEEL

This version of BRICKMAN 300, with extended cylinder and all vital components made of stainless steel, is designed for effective compaction of large amounts of PET bottles, aluminum cans and Tetra Paks containing liquid. The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, BRICKMAN 300 can be placed indoors close to the source of waste.



374_{LB/H}

AUTOMATIC SOLUTION CAPACITY FILLED PET BOTTLES



ORWAK BENEFITS





MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO_2 emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY BRICKMAN?

- Convenient fully automated compaction solution
- Impressive volume reduction of up to 20:1
- Great placement opportunities indoors



BRICKMAN 300 STAINLESS STEEL

Turns large volume of material into compact briquettes for recycling

CONVENIENT AND EFFICIENT

BRICKMAN offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding.

Furthermore, optional photocells can automize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

OPTIMIZED LOGISTICS

Thanks to BRICKMAN's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.





BRICKMAN 300 STAINLESS STEEL IS OPTIMIZED FOR:

FILLED CONTAINERS

PET bottles

CAPACITY Up to 374 lb/h

Aluminum cans

. Up to 320 lb/h

DESIGNED FOR CONTAINERS FILLED WITH LIQUID

Thanks to the following features, this sturdy version of BRICKMAN 300 is especially designed for compaction of bottles, aluminum cans and Tetra Paks containing liquid:

- Extension on the press cylinder
- Automatic greasing of the press plate Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop
- Hopper, all cover plates, shafts, cover plate guilliotine, feeding plate, brackets, machine stand reinforcement, guides, back plate, brake, stand to cover plates and briquette chute in stainless steel
- Galvanized machine stand


OPTIONAL ACCESSORIES

BRICKMAN can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

DIMENSIONS & SPECIFICATIONS

DIMEN	SIONS (inc	hes)															
А	В	С	D	E	F	G	н	1	J	К	L	М	N	0	Р	Q	R
89.50	76.75	Ø5.71	16.75	53.50	59.00	74.00	33.50	86.25	26.00	145.75	5.50	37.50	8.25	9.75	33.50	56.75	23.75

DIMENSIONS (inches)						
s	т					
32.50	43.25					

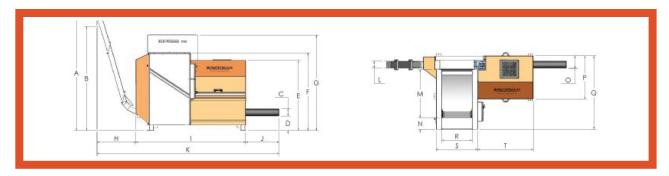

TECHNICAL SPECIFICATIONS PRESS FORCE **MACHINE PROTECTION PRESSURE** HOPPER **BRIQUETTE SIZE DENSITY* NOISE LEVEL OPERATING POWER**** WEIGHT **CLASS** 3 25"x3 25"x4-12" Up to 1000 kg/m³ IP 55 3520 lbs 55 000 lbs Up to 500 kg/cm 26 cubic ft. 68 dh (A) 3x440/460 V

We reserve the right to make changes to specifications without prior notice. * Density varies with type of material. ** Other voltages are available

ORWAK NORTH AMERICA, INC.

9200 Globe Center Drive, Suite 130 Morrisville NC 27560, USA Phone: +1-800-747-0449 Email: info@orwakbalers.com

