ORWAK HORIZONTAL 450-500 S AT

Our fully automated horizontal balers in this line offer compact dimensions for environments where space is limited. Yet they are designed to meet the challenges by centralized waste handling, where large volumes of recyclable cardboard is produced. We provide wellproven technology for special demands! The automatic tying and the continuous baling enable multi-shift operation.



AUTOMATIC SOLUTION CAPACITY BALEWEIGHT CARDBOARD CARDBOARD



ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO_2 emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK HORIZONTAL?

- Effective large-scale waste handling
- Improved internal and external logistics
- Safe and comfortable working environment
- Excellent control over the throughput
- Increased income when delivering high-quality bales directly to the recycling industry.



ORWAK HORIZONTAL 450-500 SAT

Smart fully automated solution

CONTINUOUS FEEDING AND OUTPUT

A completely automated waste management solution designed for continuous infeed, automatic horizontal or vertical strapping system with adjustable wire links, which enables you to yield optimal output.



Option: conveyor belt



OPTIMAL FEATURES

- Well proven technology
- Auto start (photocell) as standard
- High speed: fast throughput
- Adjustable bale length

HORIZONTAL 450-500 SAT **ARE OPTIMIZED FOR:**

PAPER Paper sacks

- Cardboard

PLASTIC Shrink film

PET/PEHD

A VARIETY OF INFEED OPTIONS

To fit the conditions in your environment, our horizontal balers offer a wide choice of infeed systems: manual, by bin, air-transport and conveyor belt.

Our balers can also easily be equipped with shredders, bottle presses, rufflers, strippers and different types of hoppers.

OPTIONS


- Bin lifter
- Conveyor belt
- Cooling and heating systems


More special options on demand

DIMENSIONS & SPECIFICATIONS

TECHNICAL SPECIFICATIONS

MODEL	MACHINE DIMENSIONS (LXWXH) EXCL BALE EXIT	FEED OPENING	INFEED CAPACITY	PRESS FORCE	MOTOR	SURFACE PRESSURE	CYCLES PER MINUTE	CHANNEL SECTION	OIL TANK CAPACITY
450 AT	260''x73''x136''	55.12"×39.37"	38.85 ft ³	99,200 lbs	10 Hp	81 psi	1.5-2	40''x32''	53 gal
500 S AT	260''x73''x136''	55.12"x39.37"	38.85 ft ³	110,200 lbs	20 Hp	89 psi	2.5	40''x32''	106 gal

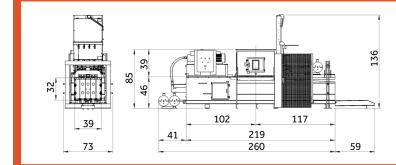

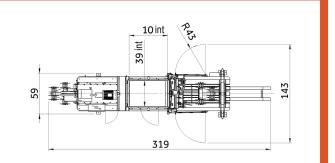

TECHNICAL SPECIFICATIONS

MODEL	TOTAL MACHINE WEIGHT	THEORETICAL OUTPUT	LOADING OUTPUT	AUTOMATIC BINDING	BALE SIZE (ADJUSTABLE LENGTH)	BALE WEIGHT CARDBOARD DEPENDS ON BALE LENGTH
450 AT	14,330 lbs	30 lbs 2649 ft ³ /h 1766 ft ³ /h 4 wires 40"x32"x32-85"		40"x32"x32-85"	990-1100 lbs	
500 S AT	15,433 lbs	5827 ft³/h	3532 ft³/h	4 wires	40"x32"x32-85"	880-1320 lbs

We reserve the right to make changes to specifications without prior notice. Bale weights are dependent upon material type.

Power: 3 x 460 V, 60 Hz

ORWAK NORTH AMERICA, INC.

9200 Globe Center Drive, Suite 130 Morrisville NC 27560. USA Phone: +1-800-747-0449 Email: info@orwakbalers.com



ORWAKBALERS.COM