


# BRICKMAN 300 STANDARD

This version of BRICKMAN 300 is designed for effective compaction of large amounts of dry cardboard. The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, BRICKMAN 300 can be placed indoors close to the source of waste.



**AUTOMATIC  
SOLUTION**



**CAPACITY  
CARDBOARD**



## ORWAK BENEFITS



### **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time for your core activities!

### **MORE SPACE & ORDER**

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### **LESS COSTS, MORE VALUE**

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.

## WHY BRICKMAN?

- Convenient fully automated compaction solution
- Impressive volume reduction of up to 20:1
- Great placement opportunities indoors

**ORWAK**  
PART OF Sulo GROUP

# BRICKMAN 300 STANDARD

Turns large volume of material into compact briquettes for recycling

## CONVENIENT AND EFFICIENT

BRICKMAN offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding.

Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## IDEAL FOR CARDBOARD COMPACTION

The model is recommended for compaction of dry cardboard and paper.



Small and compact briquette

## BRICKMAN 300 STANDARD IS OPTIMIZED FOR:

### CARDBOARD

- Corrugated cardboard

### CAPACITY

Up to 550 lb/h

## OPTIMIZED LOGISTICS

Thanks to BRICKMAN's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.


## OPTIONAL ACCESSORIES

BRICKMAN can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (inches)

| A     | B     | C     | D     | E     | F     | G     | H      | I    | J      | K    | L     | M     | N     | O     | P     |
|-------|-------|-------|-------|-------|-------|-------|--------|------|--------|------|-------|-------|-------|-------|-------|
| 89.50 | 76.75 | 53.50 | 59.00 | 74.00 | 33.50 | 86.25 | 119.50 | 5.50 | 950.00 | 8.25 | 33.50 | 56.75 | 23.75 | 32.50 | 43.25 |

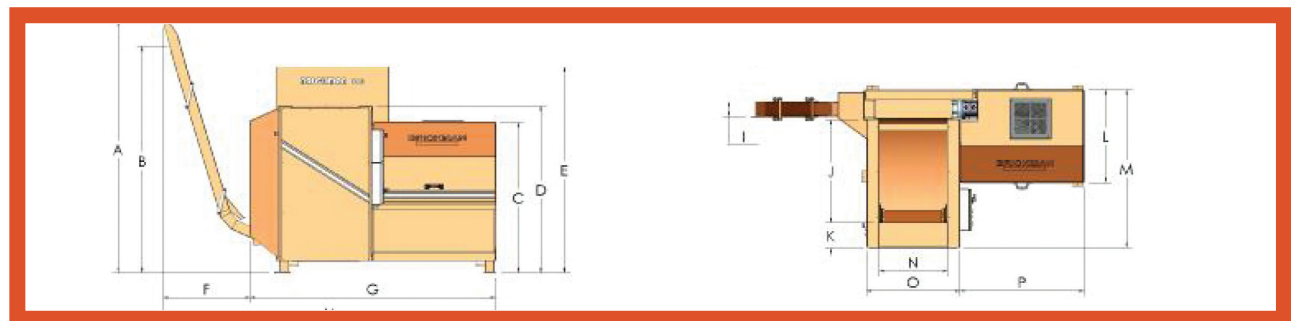

### TECHNICAL SPECIFICATIONS

| MACHINE WEIGHT | PRESS FORCE | PRESSURE        | HOPPER      | BRIQUETTE SIZE    | DENSITY*                    | NOISE LEVEL | PROTECTION CLASS | OPERATING POWER** |
|----------------|-------------|-----------------|-------------|-------------------|-----------------------------|-------------|------------------|-------------------|
| 3520 lbs       | 55,000 lbs  | Up to 500 kg/cm | 26 cubic ft | 3.25"x3.25"x4-12" | Up to 600 kg/m <sup>3</sup> | 68 db (A)   | IP 55            | 3x440/460 V       |

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

## ORWAK NORTH AMERICA, INC.

3125-108 Gresham Lake Road  
Raleigh, NC 27615, USA  
Phone: +1-800-747-0449  
Email: balers@orwakbalers.com

**ORWAKBALERS.COM**

**ORWAK**  
PART OF Julo GROUP