

ORWAK COMPACT 3115

The ORWAK COMPACT 3115 is ideal for small volumes of plastic foil, but is also designed for cardboard compaction. A material selector makes the choice easy! The cross-binding function gives a tight grip of the bale and is helpful for compaction of soft plastic or small pieces of material.



CROSS-BINDING

130 LBS

**BALE WEIGHT
CARDBOARD**



ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY ORWAK COMPACT?

- Strong compaction on the spot! Requires little space, yet provides effective volume reduction
- Easy-to-handle light weight bales
- The best choice for small to medium size volumes of cardboard and plastic

ORWAK
PART OF Sulo GROUP

ORWAK COMPACT 3115

Compact and versatile baler

PREPARED FOR CROSS-BINDING


3115 is designed for cross-binding, a function that helps secure the bales and one that is particularly useful when compacting small pieces of material.

AUTOSTART FOR EFFICIENT COMPACTION

An autostart function allows the baler to start compacting the material as soon as you close the door.

BALE TROLLEY INCLUDED

Model 3115 is always delivered with a bale trolley for effortless baling and smooth internal transportation of the bale.

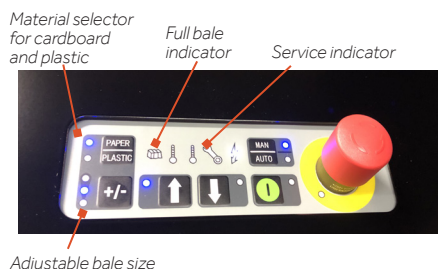

- User-friendly panel
- Autostart
- Top cover made of recycled plastic
- Adjustable bale height in three sizes
- Cross-binding

ORWAK COMPACT 3115 IS OPTIMIZED FOR:

PAPER

- Cardboard
- Shredded paper
- Paper sacks

PLASTIC FOIL

- Shrink film
- Plastic bags

OTHER METALS

- Steel straps

OTHER PLASTICS

- Plastic straps

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Thanks to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.


ORWAK CONNECT COMMUNICATION

The COMPACT balers are ready to communicate when choosing the option Orwak Connect. It is a modem-based communication service enabling the baler to send updates and alerts to the caretaker as well as vital information and bale statistics to the web portal.

Complies with the EN 16500:2014 safety requirement standard for vertical balers

DIMENSIONS & SPECIFICATIONS

DIMENSIONS				
A	B	C	D	E
6'7"	37"	32"	63"	26"

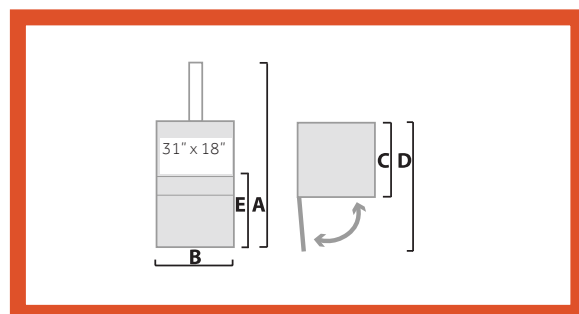

TECHNICAL SPECIFICATIONS								
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	MACHINE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 31" Height: 18"	33 secs	HP: 13,200 lbs LP: 8,800 lbs	Width: 32" Depth: 24" Height: 23"	Cardboard: Up to 130 lbs Plastic: Up to 190 lbs	838 lbs	62.3 db (A)	IP 55	Single Phase 115 V, 60 Hz, 15 A

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.

ORWAK NORTH AMERICA, INC.

3125-108 Gresham Lake Road
Raleigh, NC 27615, USA
Phone: +1-800-747-0449
Email: balers@orwakbalers.com

ORWAKBALERS.COM

ORWAK
PART OF Julo GROUP