

ORWAK APCO KIK20

Efficient, hygienic and convenient solution to the challenge to take care of all the bagged waste in residential buildings with classic wall chutes. This bagging compactor has the capacity to serve up to 180 residential units. It starts automatically when the bags drop down from the chute and provides significant volume reduction. The compacted trash is fed into plastic bags.



**HYGIENIC
COMPACTION**



ORWAK BENEFITS



MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

MORE SPACE & ORDER

Our compactor rapidly minimize the space the waste takes up, keeping floor space free and tidy.

LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO₂ emissions. Sorting at source yields a higher quality of waste material for recycling.

WHY CHOOSING THE ORWAK APARTMENT COMPACTOR?

- Saves valuable floor space in your storage area
- Keeps the maintenance area neat and tidy
- Hygienic waste management solution for household waste in apartment buildings
- The volume reduction means less waste to collect and cuts the waste reduction costs

 **ORWAK**
PART OF **sulo** GROUP

APCO KIK20


Saves floor space, cut waste costs and keeps the storage area clean

CAPACITY TO SERVE UP TO 180 RESIDENTIAL UNITS

Orwak's bagging compactor provides premium compaction in big buildings. It is just the right size to fit in your storage/maintenance area and yet large enough to keep up with your compacting needs for a building of up to 180 residential units or less! Make a difference in your building's recycling and trash compaction needs.

AUTO START

The bags conveniently drop down from the chute directly into the hopper of the compactor and thanks to a photocell the machine automatically starts compacting the trash.

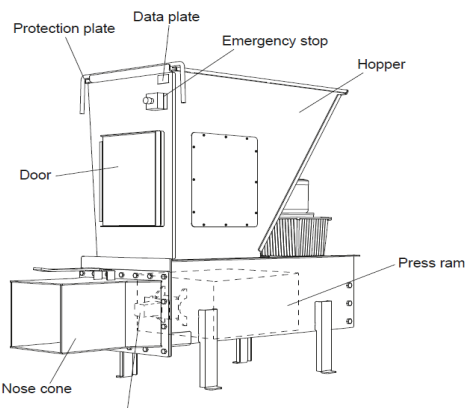

Nozzle and bag



Full bags ready for collection



QR code on the compactor for quick access to the instruction video

APCO KIK20 IS OPTIMIZED FOR:

SEMI-DRY WASTE

- General waste


Best suited for dry or semi-dry waste destined for landfill or incineration

CLASSIC "SAUSAGE COMPACTION"

Simply slip a long plastic bag over the nozzle of the compactor and the highly compacted trash will be pushed into the bag. A chain attached to the machine will tighten the bag. The operator then manually cuts and ties the bags.

FEATURES IN DETAIL

- Full bag indicator
- Replaceable wear plates and positive guides
- Motor overload protection and fused circuitry
- Over pressure protection
- Access door safety interlock switch
- "No-bag" cut off switch
- Manual chute cut-off gate
- Electric eye control with time delay
- Off-on key switch
- Operation mode lights

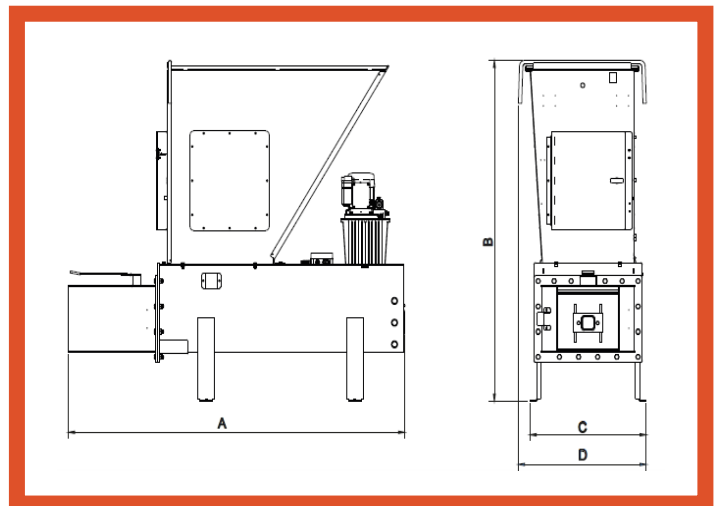

DIMENSIONS

LENGTH (A)	HEIGHT (B)	WIDTH (D)	CHANNEL WIDTH (C)	TRANSPORT HEIGHT
6'-7 1/4"	5'-10 1/2"	2'-6"	2'-3 1/2"	5'9"

TECHNICAL SPECIFICATIONS

CHAMBER OPENING	PRESS FORCE	CYCLE TIME	OPERATING CAPACITY	OPERATING DENSITY	OUTPUT WEIGHT	MACHINE WEIGHT	OPERATING POWER
21"x24"	20723 lbs	26 secs	25 cubic yards/h	450-750 lbs/cubic yard	up to 130 lbs	1333 lbs	110 V, 60 Hz

We reserve the right to make changes to specifications without prior notice.

ORWAK NORTH AMERICA, INC.

3125-108 Gresham Lake Road
Raleigh, NC 27615, USA
Phone: +1-800-747-0449
Email: balers@orwakbalers.com

ORWAKBALERS.COM

ORWAK
PART OF fulo GROUP